

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 03/059010 A1

(51) International Patent Classification⁷: **H04R 25/00**

(21) International Application Number: PCT/DK03/00003

(22) International Filing Date: 7 January 2003 (07.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2002 00048 12 January 2002 (12.01.2002) DK

(71) Applicant (for all designated States except US): **OTICON A/S** [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RASMUSSEN, Karsten, Bo** [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). **FREDERIKSEN, Peter** [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900

Hellerup (DK). **RASMUSSEN, Frank, Engel** [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK). **PETERSEN, Kim, Spetzler** [DK/DK]; Co Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).

(81) Designated States (national): AU, BR, CA, CN, IL, JP, RU, US.


(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WIND NOISE INSENSITIVE HEARING AID

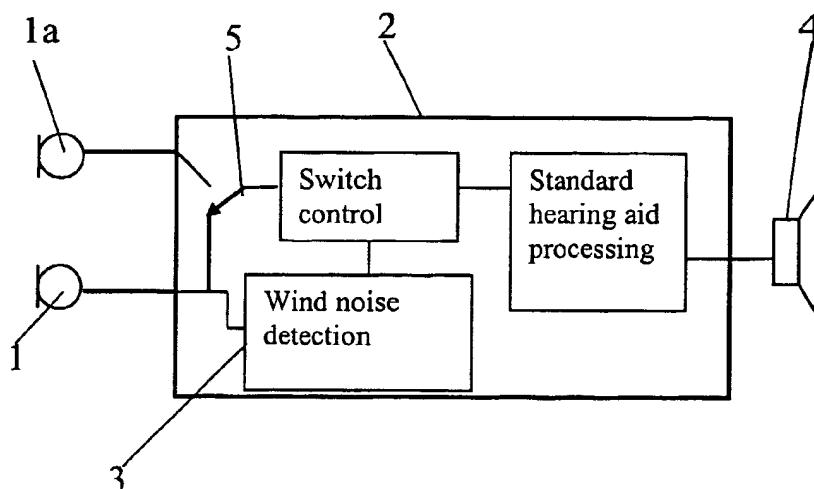

(57) Abstract: The invention concerns a hearing aid with at least one primary sound to electric converting transducer converting sounds in the environment into electrical signals and a signal processing unit for amplifying the electrical signal according to the needs of the user and an electrical to sound transducer for receiving the amplified electrical signal and delivering a sound signal to the ear wherein at least one further sound to electrical transducer is provided. The said further transducer has a sensitivity to wind noise which is smaller than the sensitivity to wind noise of the primary transducer and further the signal processing unit has means for detecting the level of wind noise in the signal from the primary sound to electric converting transducer. According to the invention also selecting means are provided for selecting the signal to be amplified from either the primary- or the at least one further sound to electrical transducer.

WO 03/059010 A1